

LENS OB-SPACE – F20.5/4

GENERAL DESCRIPTION

THIS NEW GENERATION OF HIGH PERFORMING LENSES ARE REDESIGNING THE WORLD OF SPACE READY OPTICS AT A GLOBAL LEVEL, ENSURING DETAILS NEVER SEEN BEFORE, BOTH LOOKING AT INFINITY AND AT CLOSER WORKING DISTANCES.

INTERNAL RESEARCH HAS BROUGHT IN OUR PRODUCT PORTFOLIO SPACE COMPLIANT MATERIAL AND A NEW LIST OF RAD-HARD GLASSES, ALLOWING TO OUR OPTICAL DESIGNERS NEW DEGREES OF FREEDOM IN OBTAINING BLEEDING EDGE PERFORMING SYSTEMS.

ALL OUR LENSES ARE ASSEMBLED IN ISO5 ENVIRONMENT.



LET US BE YOUR EYES IN THE SPACE!!!

OPTICAL AND MECHANICAL PARAMETERS			
FOCAL LENGTH@540NM	20.5 MM ± 2%	OPTICAL LAYOUT	DIOPTRIC
F/N	4	FOCUS	FIXED
IMAGE FORMAT	2/3" (11MM DIAGONAL)	N. OF ELEMENTS	7 WITH 1 DOUBLET
F.O.V.	± 15°	WAVELENGTH RANGE	FROM 430NM TO 670NM
BACK FOCAL LENGTH	10.73742	AR COATING	R<0.5%@430-670NM
RESOLUTION	MTF>60%@70LP/MM	FLANGE FOCAL LENGTH	CUSTOMIZED
DISTORTION	<2%	DIMENSIONS	51x35x35 MM
VIGNETTING	>10%	WEIGHT	0,072 KG
WORKING DISTANCE RANGE	INFINITY - 4M	QUALIFICATION LEVEL	NASA GEVS
AVERAGE TRANSMISSION	>94%	ATHERMALIZATION	UPON REQUEST
RAD HARD	UPON REQUEST	MOTORIZED FOCUS	UPON REQUEST
SUN EXCLUSION ANGLE	UPON REQUEST	OTHER MOUNT TYPE	UPON REQUEST
STRAY LIGHT	UPON REQUEST	CAMERA INTERFACE	CUSTOM DESIGN
		CUSTOMIZATION	UPON REQUEST


$$\text{Ground resolution} = \frac{WD \cdot \text{pixel_size}}{\text{Focal length}}$$

$$\text{Area framed on the ground} = \frac{WD \cdot \text{sensor_linear_dimension}}{\text{Focal length}}$$

Where WD is the quote.

Specification are subject to change without notice

THE CALCULATED MTF VALUES ARE DISPLAYED BELOW AND ARE VERIFIED AT THE MAXIMUM F/N AND THE BEST FOCUS PLANE.
THE COLORED LINES REPRESENT THE F.O.V. STARTING FROM THE CENTER (0%) TO THE CORNER (100%).

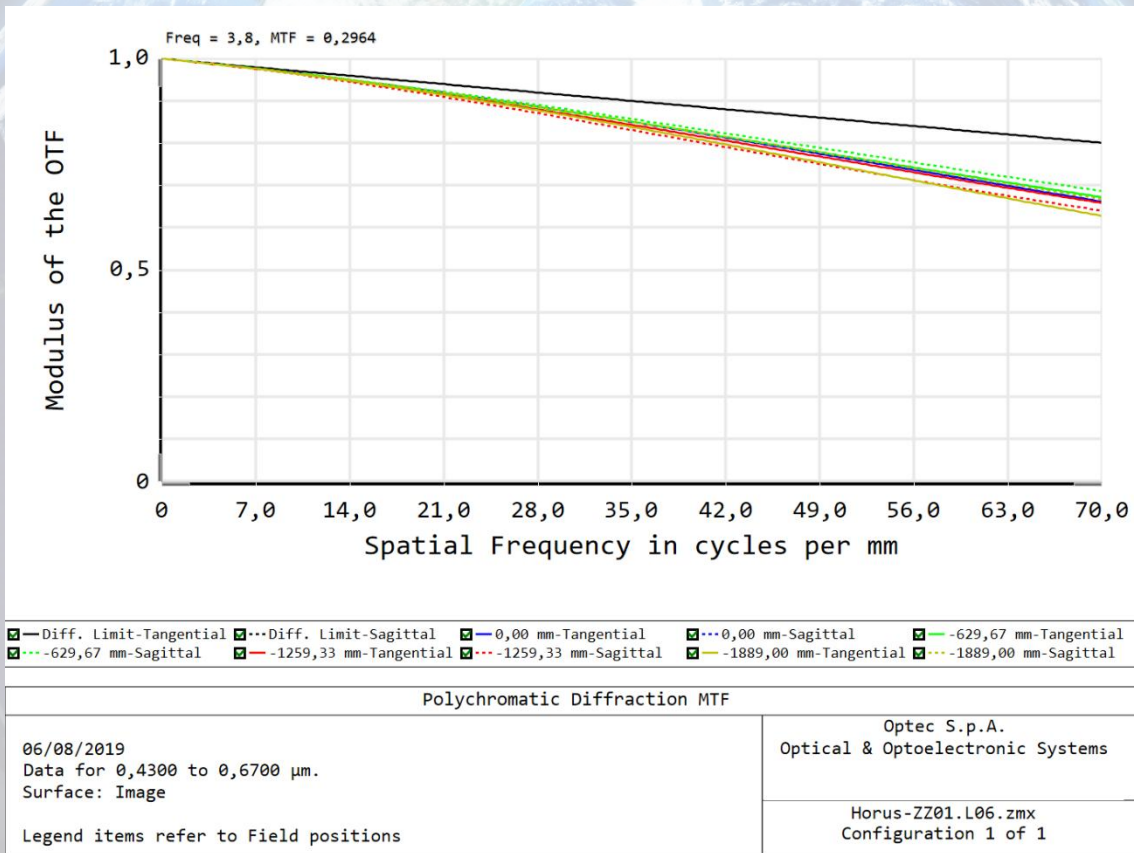

MORE DETAILS ARE AVAILABLE UPON REQUEST AND TECHNICAL DRAWINGS ARE OPEN FOR THE CUSTOMERS AND THEIR NEEDS.

Specification are subject to change without notice