LENS OB-SPACE - F500/5.6

GENERAL DESCRIPTION

THIS NEW GENERATION OF HIGH PERFORMING LENSES ARE REDESIGNING THE WORLD OF SPACE READY OPTICS AT A GLOBAL LEVEL, ENSURING DETAILS NEVER SEEN BEFORE, BOTH LOOKING AT INFINITY AND AT CLOSER WORKING DISTANCES.

INTERNAL RESEARCH HAS BROUGHT IN OUR PRODUCT PORTFOLIO SPACE COMPLIANT MATERIAL AND A NEW LIST OF RAD-HARD GLASSES, ALLOWING TO OUR OPTICAL DESIGNERS NEW DEGREES OF FREEDOM IN OBTAINING BLEEDING EDGE PERFORMING SYSTEMS.

ALL OUR LENSES ARE ASSEMBLED IN ISO5 ENVIRONMENT.

LET US BE YOUR EYES IN THE SPACE !!!

	OPTICAL AND MECHANIC	AL PARAMETERS	
FOCAL LENGTH@560NM	500	OPTICAL LAYOUT	CATADIOPTRIC
F/N	5.6	Focus	FIXED
IMAGE FORMAT	28мм	N. OF ELEMENTS	6
		WAVELENGTH RANGE	450-900nm
F.O.V.	±1.6°	AR COATING	R<1%@450-900nm
BACK FOCAL LENGTH	12.02мм	FLANGE FOCAL LENGTH	CUSTOMIZED
RESOLUTION	MTF>25%@100LP/MM	DIMENSIONS	UPON REQUEST
DISTORTION	<0.5%	WEIGHT	UPON REQUEST
VIGNETTING	<5%	QUALIFICATION LEVEL	NASA GEVS
WORKING DISTANCE RANGE	INFINITY	ATHERMALIZATION	-20°C/+60°C
AVERAGE TRANSMISSION	>85%	MOTORIZED FOCUS	UPON REQUEST
RAD HARD	UPON REQUEST	OTHER MOUNT TYPE	UPON REQUEST
SUN EXCLUSION ANGLE	UPON REQUEST	CAMERA INTERFACE	CUSTOM DESIGN
STRAY LIGHT	UPON REQUEST	CUSTOMIZATION	UPON REQUEST


 $Ground\ resolution = \frac{WD \cdot pixel_size}{Focal\ length}$

 $\textit{Area framed on the ground} = \frac{\textit{WD} \cdot \textit{sensor_linear_dimension}}{\textit{Focal length}}$

Where WD is the quote.



THE CALCULATED MTF VALUES ARE DISPLAYED BELOW AND ARE VERIFIED AT THE MAXIMUM F/N AND THE BEST FOCUS PLANE. THE COLORED LINES REPRESENT THE F.O.V. STARTING FROM THE CENTER (0%) TO THE CORNER (100%).

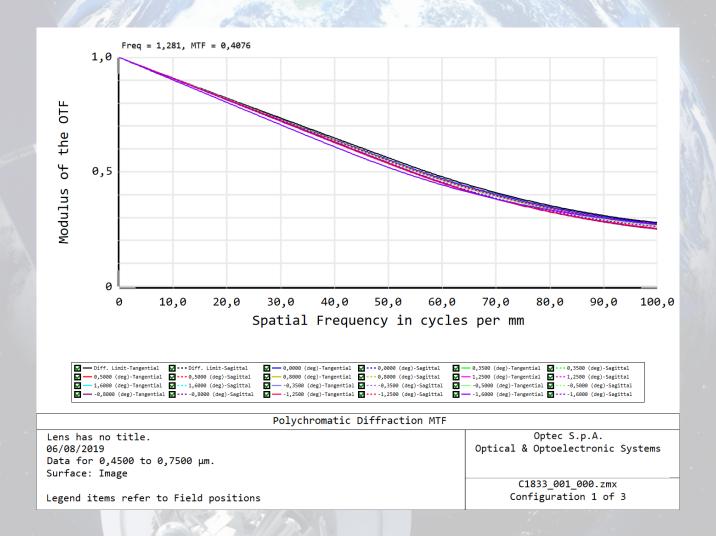

MORE DETAILS ARE AVAILABLE UPON REQUEST AND TECHNICAL DRAWINGS ARE OPEN FOR THE CUSTOMERS AND THEIR NEEDS.

