




THE CALCULATED MTF VALUES ARE DISPLAYED BELOW AND ARE VERIFIED AT THE MAXIMUM F/N AND THE BEST FOCUS PLANE.  
 THE COLORED LINES REPRESENT THE F.O.V. STARTING FROM THE CENTER (0%) TO THE CORNER (100%).

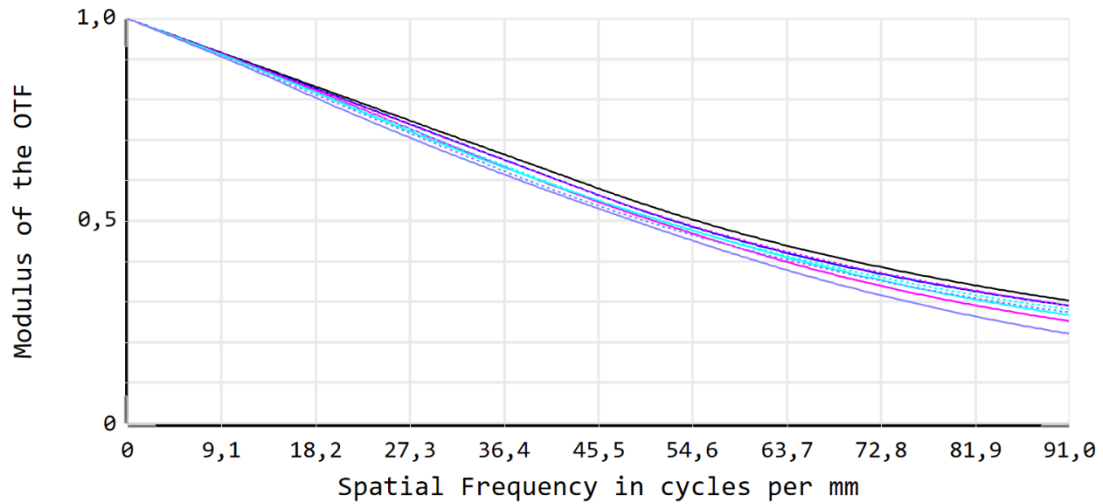

<input checked="" type="checkbox"/> — Diff. Limit-Tangential	<input checked="" type="checkbox"/> - - - Diff. Limit-Sagittal	<input checked="" type="checkbox"/> — 0,0000 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 0,0000 (deg)-Sagittal	<input checked="" type="checkbox"/> — 1,1893 (deg)-Tangential
<input checked="" type="checkbox"/> - - - 1,1893 (deg)-Sagittal	<input checked="" type="checkbox"/> — 1,6820 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 1,6820 (deg)-Sagittal	<input checked="" type="checkbox"/> — 2,0600 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 2,0600 (deg)-Sagittal
<input checked="" type="checkbox"/> — 1,1893 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 1,1893 (deg)-Sagittal	<input checked="" type="checkbox"/> — 1,6820 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 1,6820 (deg)-Sagittal	<input checked="" type="checkbox"/> — 2,0600 (deg)-Tangential
<input checked="" type="checkbox"/> - - - 2,0600 (deg)-Sagittal				

Polychromatic Diffraction MTF	
Lens has no title. 12/09/2019 Data for 0,4000 to 0,9000 μm. Surface: Image  Legend items refer to Field positions	Optec S.p.A. Optical & Optoelectronic Systems  C1934_001_000.zmx Configuration 1 of 6

MORE DETAILS ARE AVAILABLE UPON REQUEST AND TECHNICAL DRAWINGS ARE OPEN FOR THE CUSTOMERS AND THEIR NEEDS.