


THE CALCULATED MTF VALUES ARE DISPLAYED BELOW AND ARE VERIFIED AT THE MAXIMUM F/N AND THE BEST FOCUS PLANE.
THE COLORED LINES REPRESENT THE F.O.V. STARTING FROM THE CENTER (0%) TO THE CORNER (100%).

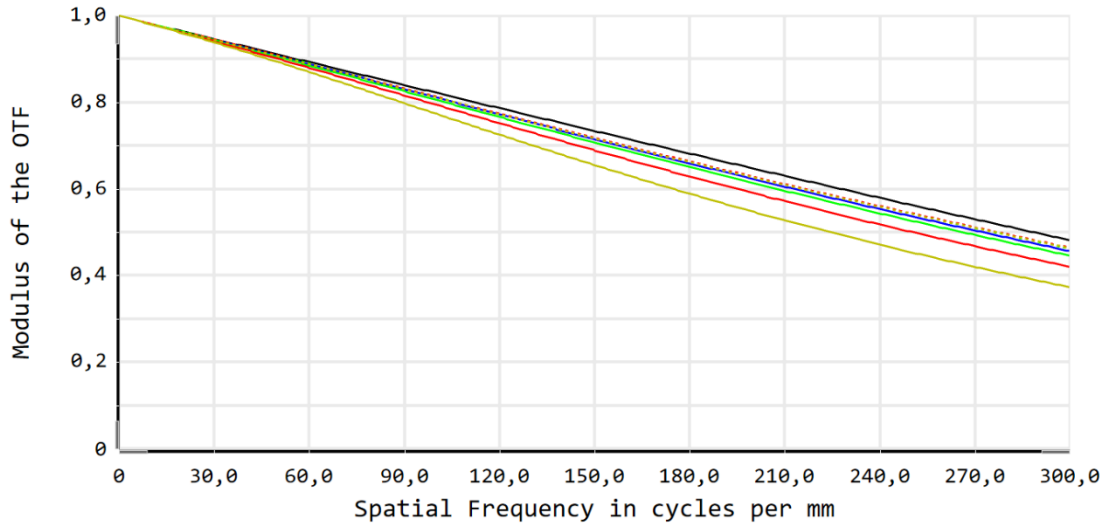

<input checked="" type="checkbox"/> — Diff. Limit-Tangential	<input checked="" type="checkbox"/> - - - Diff. Limit-Sagittal	<input checked="" type="checkbox"/> — 0,0000 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 0,0000 (deg)-Sagittal	<input checked="" type="checkbox"/> — 0,5538 (deg)-Tangential
<input checked="" type="checkbox"/> - - - 0,5538 (deg)-Sagittal	<input checked="" type="checkbox"/> — 0,7830 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 0,7830 (deg)-Sagittal	<input checked="" type="checkbox"/> — 0,9548 (deg)-Tangential	<input checked="" type="checkbox"/> - - - 0,9548 (deg)-Sagittal

Polychromatic Diffraction MTF	
06/08/2019 Data for 0,4300 to 0,8500 μm. Surface: Image	Optec S.p.A. Optical & Optoelectronic Systems
Legend items refer to Field positions	def.fn2.3.ott P2.vuoto.zmx Configuration 1 of 5

MORE DETAILS ARE AVAILABLE UPON REQUEST AND TECHNICAL DRAWINGS ARE OPEN FOR THE CUSTOMERS AND THEIR NEEDS.

Specification are subject to change without notice